



Mod .300 BT

EN 13241-1
CE
(89/106/CE)



**USA PIVOTANTA PENTRU TEMPERATURI
NEGATIVE CU GROSIME BATANT 120 mm**



**DOOR ON HINGES FOR LOW TEMPERATURE
WITH 120 mm THICK WING**



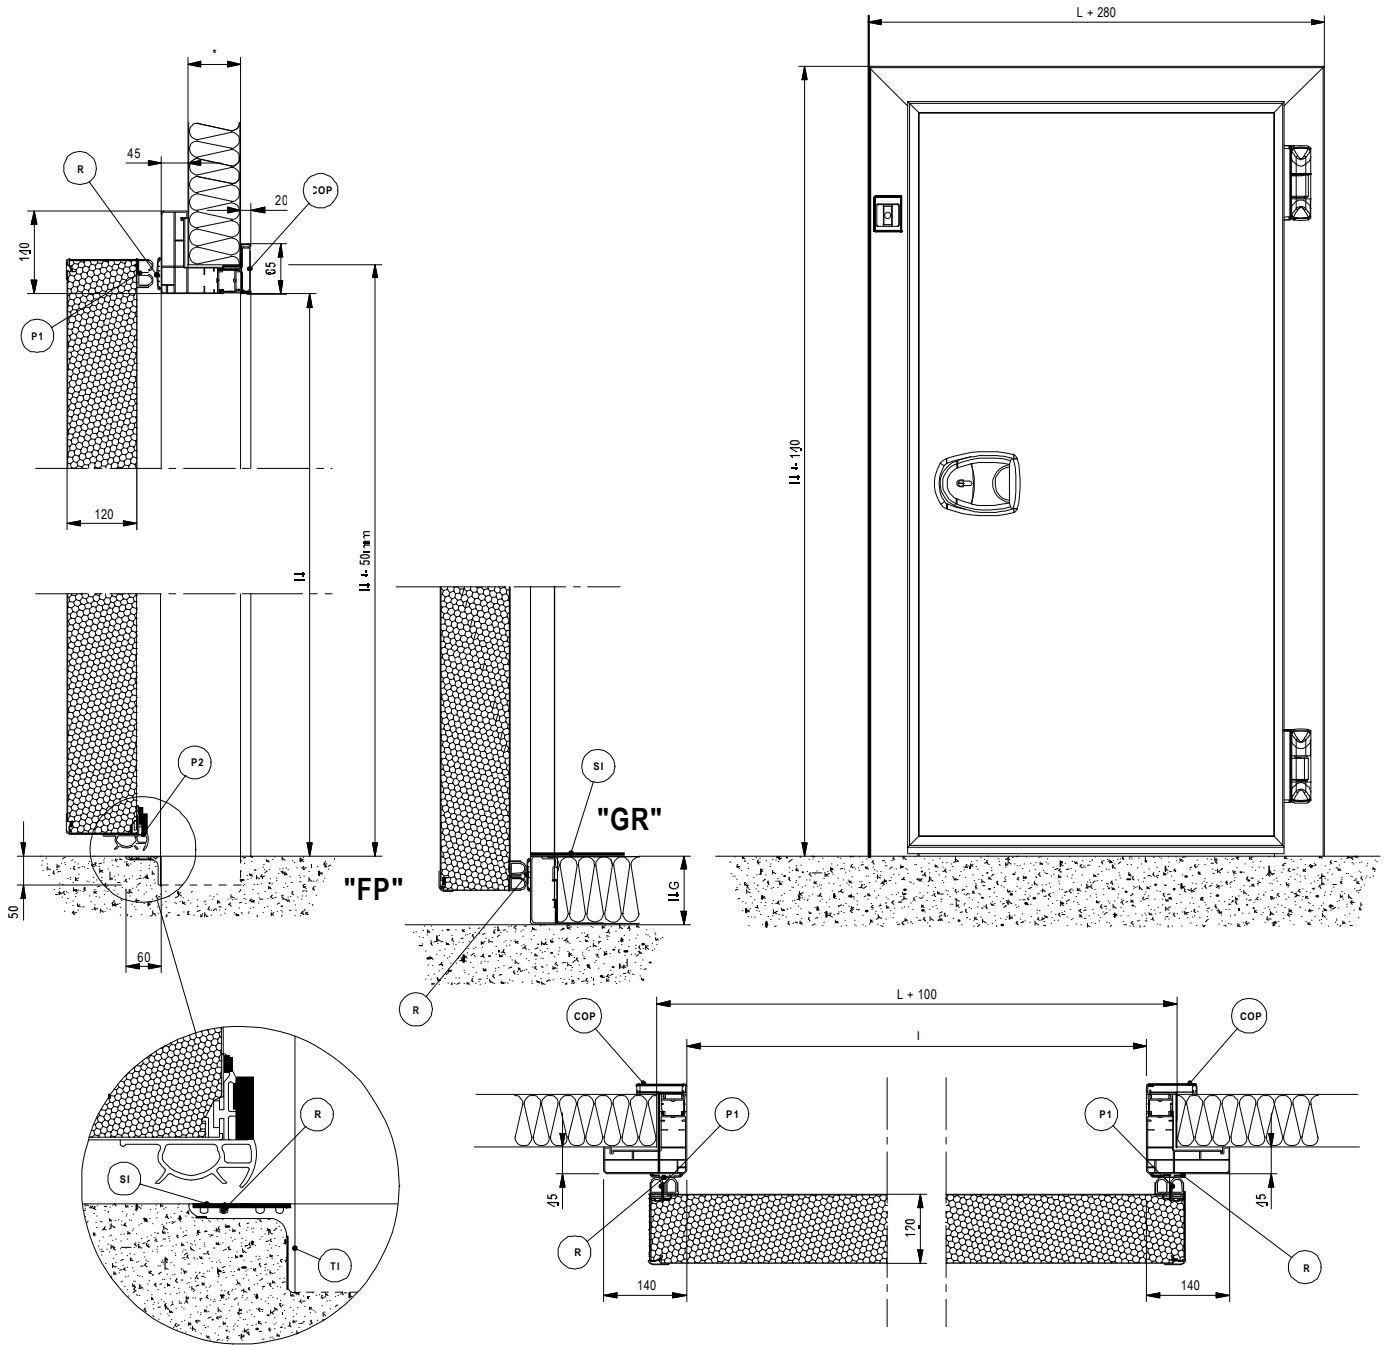
**PORTE SUR CHARNIERES POUR BASSE TEMPERATURE
AVEC VANTAIL DE 120 mm D'EPaisseur**

ed.10/2011

MIV INSULATING SYSTEMS s.r.l.

SC AB TEHNIC PROFESIONAL SRL – Str. Alunisului nr. 164 - +40 213 32 08 48 – office@abtehnic.ro – www.abtehnic.ro

L'ufficio tecnico si riserva il diritto di modificare il prodotto senza preavviso. Disegni, quote, immagini e grafiche se materiale pubblicitario sono da considerarsi indicativi e non vincolanti all'installazione e al progetto. I tecnici Dipenda non sono né autorizzati né incaricati a rilasciare certificati di conformità e non sono responsabili per i danni causati dall'uso improprio del prodotto.


DATE TEHNICE

TECHNICAL FEATURES

CARACTERISTIQUES TECHNIQUES

*	Panou prefabricat	*	Prefabricated panel	*	Paroi prefabbric�e
P1	Garnitura perimetrala	P1	Perimetral gasket	P1	Joint perimetral
P2	Garnitura inferioara	P2	Lower gasket	P2	Joint inferieur au sol
TI	Prag din aluminiu	TI	Threshold	TI	Seuil en aluminium
SI	Prag din inox	SI	INOX stainless steel threshold	SI	Seuil en acier INOX
GR	Prag cu trepte	GR	Threshold with step	GR	Seuil � marche
R	Rezistent� electrica	R	Heating cable	R	Cable �lectriche chauffant
FP	Prag pentru acelasi nivel	FP	Threshold for same level floor	FP	Seuil � fil sol
COP	Cadru-contr�	COP	Counter-frame	COP	Contro-cadre

MIV INSULATING SYSTEMS s.r.l.